




125.9" (3.2m) Laminated Frontlit

Item Code: BS-LF006-125R-GL-G

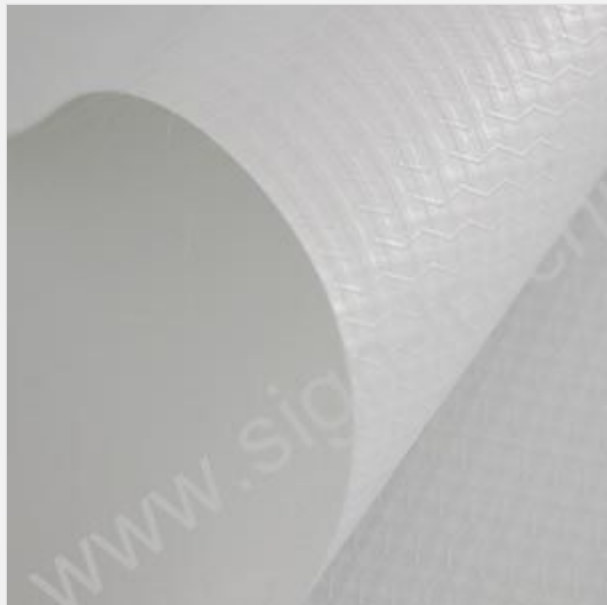

FOB Price: **\$106/roll**

Mini Order: 40 rolls

Average Rating: 1b (kg)

[Inquire Now](#)

Overview

Product Characteristic:

- . 32% above high light-admitting quality.
- . Anti-UV, weather-resistant.
- . Mildewproof, antifouling processed surface.
- . Could be printed directly or with the film.
- . Strong structure, anti-typhoon.
- . Flame retardant, safe.
- . Bearing chemistry solvent.

Product Description:

Good smoothness, high bonding strength, stable ink absorbing, expressive force, self-cleaning, faster drying, perfect printing ability, anti-UV surface.

Packing:

Inner cores are packed with craft paper or hard tube.

Application:

Signage, digital printing, screen printing for banner and outdoor, indoor digital printing and so on.



Details

Width	125.9" (3.2m)
Length	54.6Y(50m)
Speci-	200*300 18*12

Specifications

Item	Metric		Test Method
Weight	300±10	gsm	DIN53352 BS3424
Breaking Strength	497/301	N/2.0" (5cm)	DIN53354 BS3424
Tearing Strength	85/65	N	DIN53356 BS3424
Adhesion	60	N/2.0" (5cm)	DIN53357 BS3424
Width	Up to 11.5' (350cm) (0203)		
FR Certification	We can reach:M2,B1,B2,DIN75200,NFPA701		
Lacquering	Products can be lacquered with ACRYLIC or PVDF		
Cd%,Pb%,As%,Ba%,Cr%,Hg%,Se%	We can reach:EN71-3		



NETSUITE®
ONE SYSTEM. NO LIMITS.



Member
INTERNATIONAL
SIGN ASSOCIATION



Member
Specialty Graphic Imaging Association



ACCREDITED
BUSINESS

Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com