



3.2M High Precision Solvent Printer

Item Code: LFIP-MJT-LA3212XR128



FOB Price: **\$9,083/set**

Mini Order: 1 set

Shipping Weight: ★★☆☆☆

Average Rating: 2886.4lb (1312kg)

[Inquire Now](#)

Overview

Description:

The LFIP-MJT-LA3212XR128 is an economy wide format solvent printer. It uses Xaar128/40-W printheads; the HIWIN straight line guide rail, high resolution mechanical and electrical system design, makes it very economical for users.

Features:


- . Xaar128/40-W printhead.
- . Removable leg, decreasing the freight of the clients.
- . Three-heating systems: Pre-heater, printer-heater, and after-heater, adjust the temperature of the media, increasing the printing quality.
- . Use the lead shine digital motor driver and consistent precision in terms of mechanical and control systems.
- . Automatic flash print Printhead automatic flash works, while interval printing.



Extra Width Printing Platform



Four-in-one Electric Temperature Controller

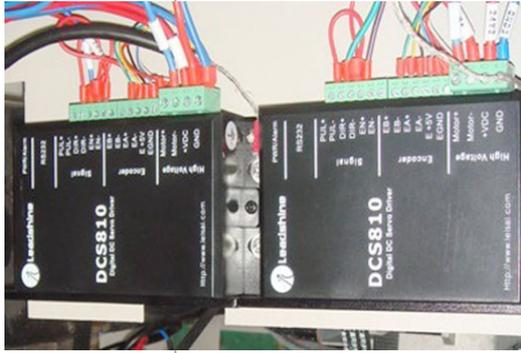

Leadshine Digital Servo Driver



HIWIN Guide Rail

Application:

Adopting four standard colors printing, it is suitable for outdoor advertising banners.

Main Technical Parameters:

Max. Print Width: 126.0" (3200mm)
 Max. Media Width: 126.8" (3220mm)
 Printhead: Xaar128 (8-16print-heads)
 Resolution: 360/720dpi
 Ink Type: Solvent ink
 Colors: C. M. Y. K
 PACKING SIZE: 187.4"x57.1"x37.4" (4760x1450x950mm)
 Net Weight/Gross Weight: 1433.0lb (650kg)/1653.5lb (750kg)

Details

Colors	C. M. Y. K
Print Speed	21m ² /h - 84m ² /h
Maximum Resolution	740dpi
Ink type	Solvent Inks
Max Media Width	126.0" (3200mm)
Print head	Xaar128/40-W printhead
Max print width	126.0" (3200mm)

Specifications

Model	LA3212XR128
-------	-------------

PrintingType		Separation Printing		
Printing Technology		Piezo printing		
Printhead Type		Xaar128/40-W printhead		
Media Transmission		Roll-to-roll		
Printing Media Width		126.0" (3200mm)		
Printing Port		High speed USB boards		
Data Transmission		Fabric Cable		
Output Model		Rip Printing/Printing After RIP/Net-print		
RIP Software		Photoprint,Ultraprint		
Printing Mode		8PC	12PC	16PC
Printing Speeds	High Speed	180*370dpi 42m2/h 2PASS	180*370dpi 63m2/h 2PASS	180*370dpi 84m2/h 2PAS
	Mid Speed	240*555dpi 31m2/h 3PASS	240*555dpi 47m2/h 3PASS	240*555dpi 63m2/h 3PAS
	Low Speed	240*740dpi 21m2/h 4PASS	240*740dpi 31m2/h 4PASS	240*740dpi 42m2/h 4PAS
Ink Type/Color		SOLVENT INKS /CMYK		
Power Requirement		220V AC		
System		220V±10%,< 4A,50/60HZ		
Heating		220V±10%,< 16A,50/60HZ		
Operation Environment		Temperature:20°C?25°C; Humidity:40%?70%RH		
Printing Resolution		740dpi		
Media Types		Banner, adhesive vinyl, PVC self adhesive, backlit, flex media within 5mm thickness		
Dimension/Net Weight		180.3"x30.7"x51.2" (4580x780x1300mm)/1433.0lb (650kg)		
Packing size/Gross Weight		187.4"x57.1"x37.4" (4760x1450x950mm)/1653.5lb (750kg)		



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com