




3-SMD 5050 RGB Non water-proof module 35x35MM

Item Code: LED module-LBY-5F12T3535-3CNWF

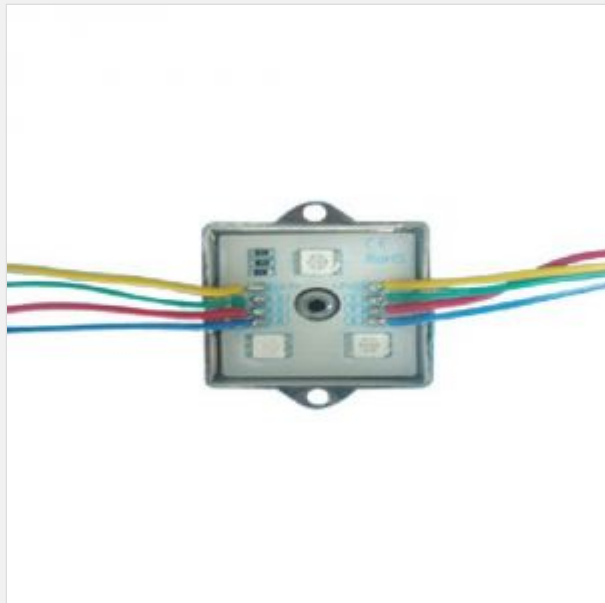

FOB Price: **\$1.15/pc**

Mini Order: 200 pcs

Average Rating: 1b (kg)

[Inquire Now](#)

Overview

Characteristics:

- . High brightness LED SMD as a lamp-house, with wide angle view and a small aperture.
- . Controlled by the chips with constant current, has a steady current between the cathode and the anode.
- . Low voltage, safe, and gearless.
- . With a settled orifice and 3M gummed paper, very convenient to install.
- . Longlife above 80,000hrs.
- . Low power consumption, energy conservation and made for save electricity.

Usage:

LED SMD modules are widely used for solid lighting character, LED signs, LED lighting box, scenery designs and decoration, etc.

Sample:



Details

LED Number	3
SMD Package Model	5050
Color	White
Shape	Rectangular
Brightness	Medium
Material	Plastic

Specifications

Basic parameter			
Color	multi-color	LED type	5050 SMD
LED quantity	3PCS	Demension	1.4"*1.4"*0.2" (35*35*4mm)
Module interface	Yellow/Red/Green/Blue 0.2"*0.02" (4*0.5mm) 0.1"*2.4" (2*60mm)RVleads	Interface definition	Yellow anode,Red/Green/Blue cathode
Cluster quantity	20pcs	Module space between	2.4" (60mm)±5%

Weight	0.7oz (20g)±5%	Lifespan	MTBF>50000hours
Enviroment parameter			
Working temperature	-40°C?60°C		
Outdoor level	IP65 completely satisfied the outdoor lighting standard		
Electronic specification			
Input voltage	D12V±5%	Max power	0.63 W
Driving mode	Invariablenes Voltage (Insure every LED working under the invariablenes voltage)		
Lighting capability			
Luminous flux	1.9floz (54lm)		
Beam angle	>120°		



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com