




## 3-SMD 5050 RGB Water proof module 35x35mm

Item Code: LED module-LBY-5F12T3535-3CWF

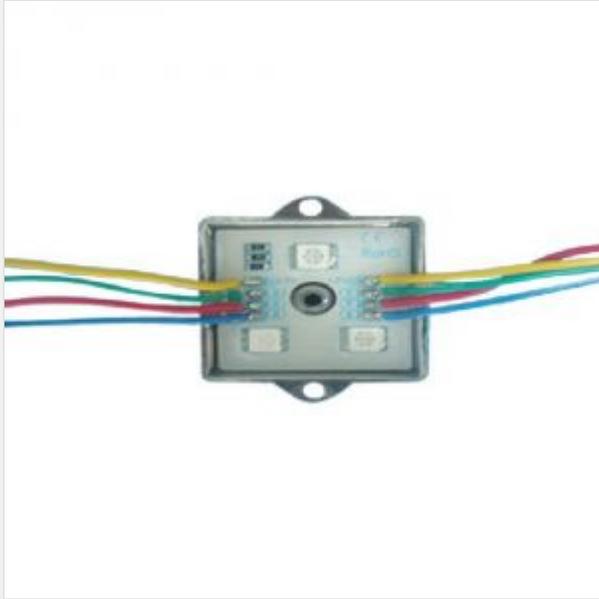

FOB Price: **\$1.15/pc**

Mini Order: 200 pcs

Average Rating: lb (kg)

[Inquire Now](#)


### Overview

**Characteristics:**

- . High brightness LED SMD as a lamp-house, having a wide angle view and petty aperture.
- . Controlled by the chips with constant current, has a constant working current and aisle between the cathode and anode.
- . Low voltage, safe and jar less.
- . With a settled orifice and 3M gummed paper, very convenient to install.
- . Long life time, above 80000hrs.
- . Low power consumption, energy conservation and saving electricity.

**Usage:**

This LED SMD module is used for solid lighting character, LED signs, LED lighting box, scenery designs, décor, etc.

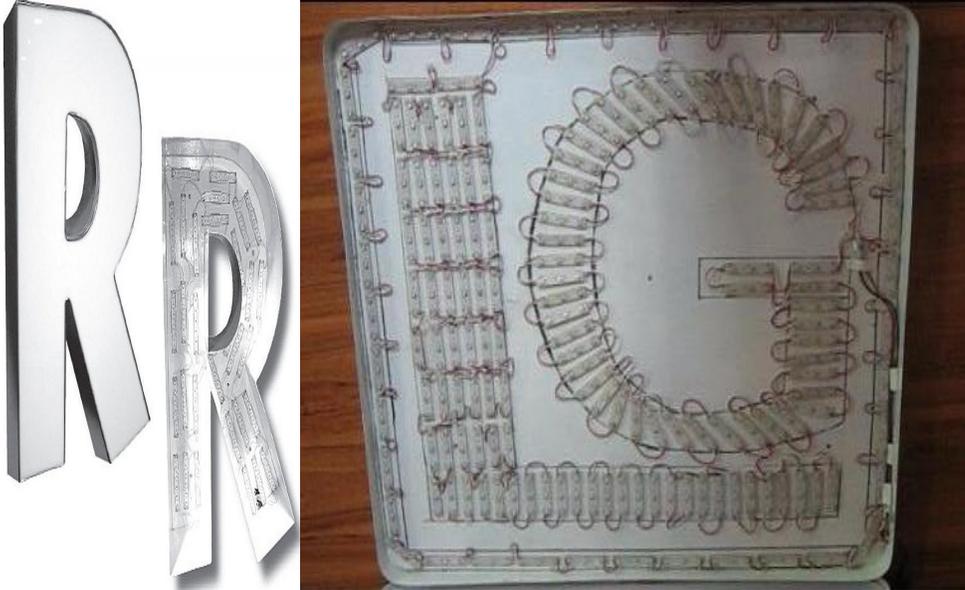**Sample:****Details**

Material	Metal
LED Number	3
SMD Package Model	5050
Color	RGB
Shape	Rectangular
Brightness	Medium

**Specifications**

<b>Basic parameters</b>			
<b>Color</b>	multi-color	<b>LED type</b>	5050-SMD

**LED Qty** 3PCS

**Dimension** 1.4" x 1.4" x 0.2" (35 x 35 x 4mm)

<b>Module interface</b>	Yellow/Red/Green/Blue 0.2" x 0.02" (4 x 0.5mm) 0.1" x 2.4" (2 x 60mm)RVleads	<b>Interface definition</b>	Yellow anode,Red/Green /Blue cathode
<b>Cluster Qty</b>	20pcs	<b>Module space between</b>	2.4" (60mm)±5%
<b>Weight</b>	0.4oz (10g)±5%	<b>Lifespan</b>	MTBF>50000hours
<b>Environment parameters</b>			
<b>Working temperature</b>	-40°C?60°C		
<b>Defend grade</b>	IP65 completely satisfis the outdoorlighting standard		
<b>Electronic specifications</b>			
<b>Working input voltage</b>	D12V±5%	<b>Max power</b>	0.63 W
<b>Driving mode</b>	Invariable Voltage! (Insure every LED working under the invariable voltage)		
<b>Lighting capability</b>			
<b>Luminous flux</b>	1.9flox (54lm)		
<b>Beam angle</b>	>120°		



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com