



3-SMD 5050 Water Proof Module 35x35mm

Item Code: LED module-LBY-5F12T3535-3CWF



FOB Price: **\$1.15/pc**

Mini Order: 200 pcs

Average Rating: 1b (kg)

[Inquire Now](#)

Overview


Characteristic:

- . High brightness LED SMD as a lamp-house, having a wide angle view and petty aperture.
- . Controlled by the chips with constant current, having constant working current and indiscriminate between the cathode and anode.
- . Low voltage, safe and jar less.
- . With a settled orifice and 3M gummed paper, very convenient to install.
- . Long life time, above 80000hrs.
- . Low power consumption, energy conservation and saving electricity.

Application:

This LED SMD module is used for solid lighting character, LED signs, LED lighting box, scenery designs, décor, etc.

Sample:

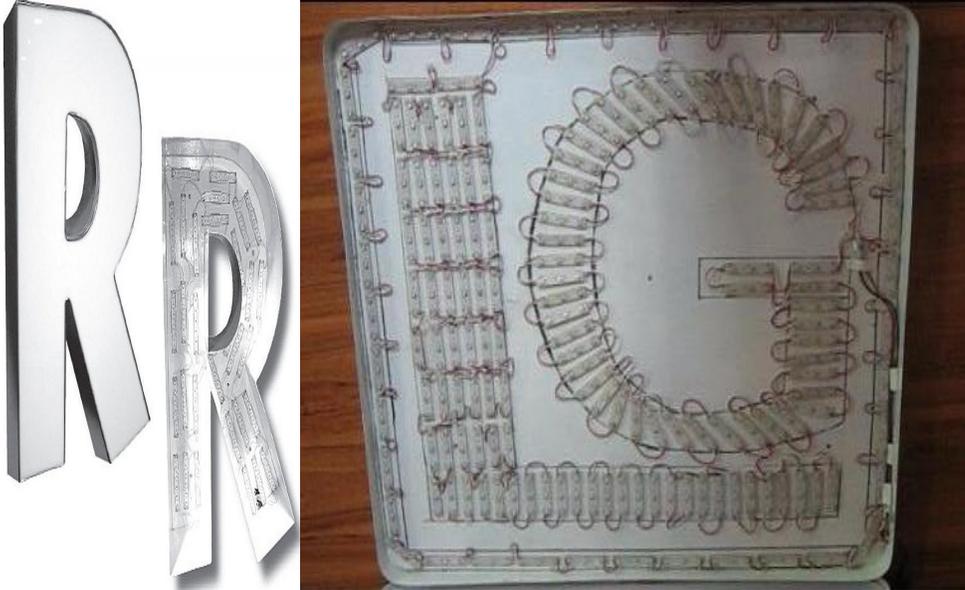

Details

Material	Metal
Brightness	Medium
LED Number	3
SMD Package Model	5050
Color	White
Shape	Rectangular

Specifications

Basic parameters			
Color	Red, yellow, blue, green, white	LED type	5050-SMD

LED Qty 3PCS **Dimension** 1.4" x 1.4" (35 x 35mm)

Module interface	Gray 0.5mm 0.1" x 3.0" (2 x 75mm) RVleads	Interface definition	Gray anode, white cathode
Cluster Qty	20pcs	Module space between	
Weight	0.4oz (10g)±5%	Lifespan	MTBF>50000hours
Environment parameters			
Working temperature	-40°C?60°C		
Defend grade	IP65 completely satisfies the outdoorlighting standard		
Electronic specifications			
Working input voltage	D12V±5%	Max power	0.63 W
Driving mode	Invariable voltage! (Insure every LED working under the invariable voltage)		
Lighting capability			
Luminous flux	1.9floz (54lm)		
Beam angle	120°		



Copyright © 1999-2012 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com