




One Way Vision

Item Code: BS-PO550-50R-PY

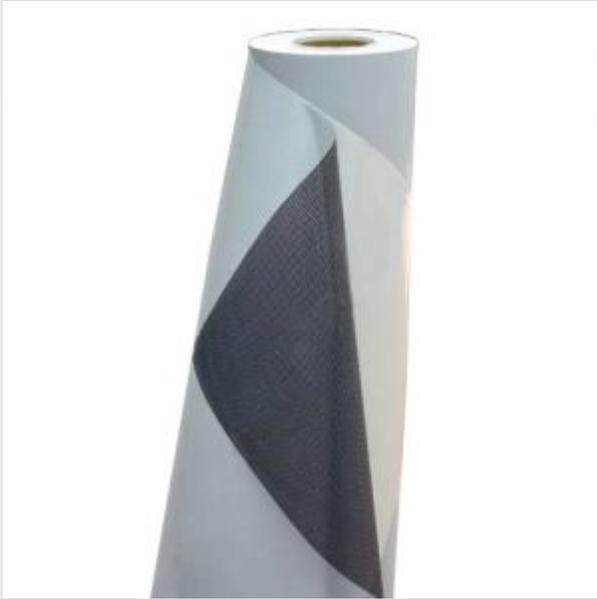

Mini Order: 50 rolls

Shipping Weight: ★★☆☆☆

Average Rating: 53.9lb (24.5kg)

[Inquire Now](#)

Overview




• **Surface film:** 160 micron Black/White laminated film, and the low-chromium film of the surface materials is according to the ROHS standard. Good whiteness, wonderful hiding performance, and scalability-resistant, anti-UV, good ink absorbing, high accuracy of the screen printing, bright color, use the black coating between the film and glue, which can truly achieve non-residual gum, none-spilling gum and removable.

• **Release paper:** 140gsm kraft paper.

• **Black coating technique:** The coating has the excellent adhesion of the PVC film, good intimacy of the acrylic type glue, as well as the excellent performance of climate-resistant.

From both technology and process, it achieves the perfect consistency on PVC film and black coating, black coating and acrylic type glue, as well as the acrylic type glue and the object which is pasted on, it finds fundamental solution of residuing the black glue as other coating one-way-vision, as well as the problem of dirty surface and unclear picture which is made by the spilling glue from the hole of other one way vision.

Product Details

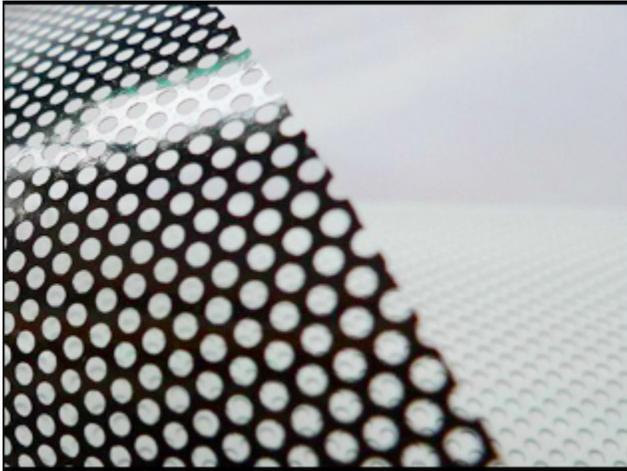

—Size: 1.27*50M

—Net Weight: 23kg



—Gross Weight: 24.5kg

—Packing Size: 1.34×0.215×0.2M


—Number : BS-PO550-50R-PY

—Thickness (mm) : 0.13 ± 0.05

Instruction

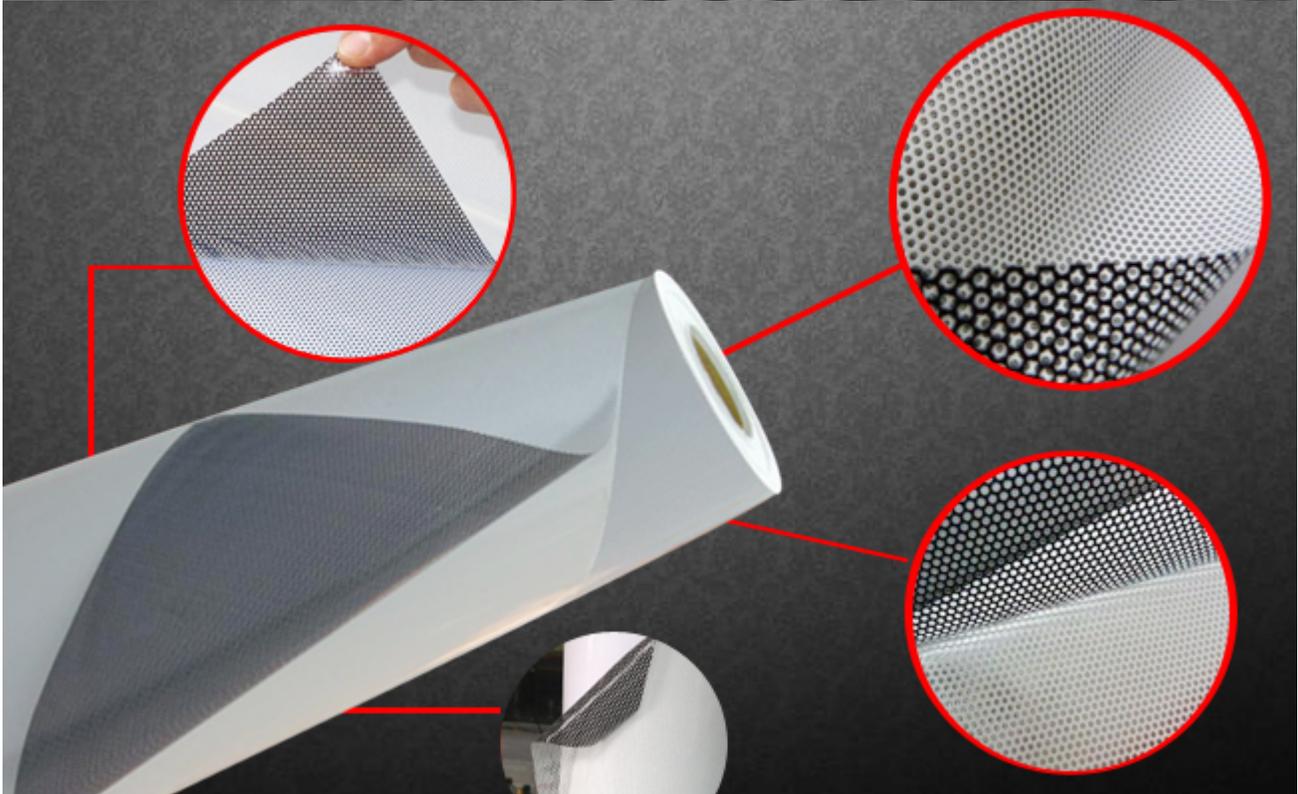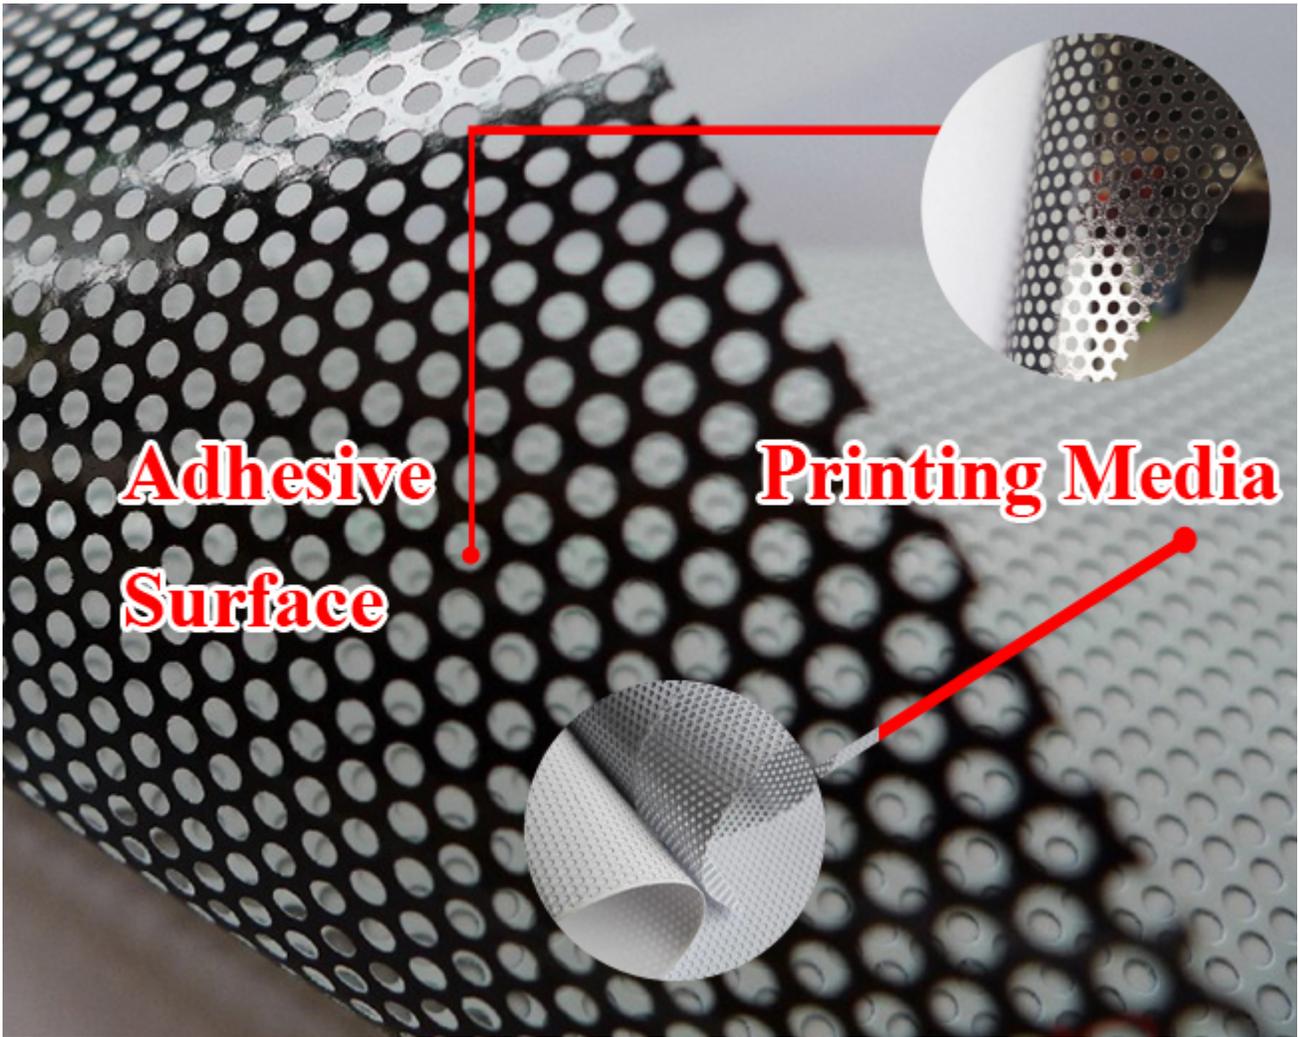

Product Usage



1. Take out the media



2. Put into printer for printing



3. Paste it after printing

Application

The application of the printer types:

Solvent: Vutek, Noel, Scitex, DGI, Teckwin, Yaselan, Flora, Fitto, Infinity, GongZheng, LiYu

ECO solvent: Mutoh, Roland, 118.1" (3m), Mimaki and others.

The scope of application:

Used for the wide format digital printing, eco solvent printing and screen printing indoor and outdoor, mainly used in the advertising of the buses, taxis, subway and other means of transport, glasses, glass wall, windows of shopping mall. Because of its one-way-vision function, it also can be used in various security areas, such as automated teller machines, interrogation rooms and airport areas.

Vehicle One Way Vision Advertisement

Effects on glass in commercial buildings





Product Process



Quality report:



Specifications

| | | |
|--------------------|---------------------------|----------------------------------|
| | Product Code | BS-PO550-50R-PY |
| PVC | Material | Anti-extension PVC membrane |
| | Thickness?mm? | 0.13 ± 0.05 |
| | Weight ?g/?? | 180 ± 10 |
| | Color | White (Black) |
| | Diameter(mm) | 1.6±0.01 |
| | Back | Black layer |
| Adhesive | Adhesive type | Removable Clear Acrylic Adhesive |
| | Initial Tack | Glass,300N/m |
| | Final Tack | Glass,300N/m |
| Liner | Bottom Paper | Liner |
| | BottomPaper Thickness(mm) | 0.14 ± 0.5 |
| | | 0.18 ± 0.5 |
| | Bottom paper Weight(g/?) | 140 ± 5 |
| | | 180 ± 5 |
| Bottom Paper Color | White | |

| | | |
|------------------------|-----------------------|--|
| Product specifications | Light P enetration(%) | 50—60 |
| | Width(mm) | 980±1 127±1 1370±1 1520±1 |
| | Length(m) | 50±0.1 |
| | Storage Period | 12 months under ordinary condition at temperature of 22? and relative humidity of 50-55% |



Copyright © 1999-2013 by Beijing ChinaSigns Information Company Limited All Rights Reserved.

Email:info@sign-in-china.com Tel:+86 132 6410 3286 www.sign-in-china.com