

LMX505F

Application

1. Advertisement signs the double-sided light box
2. LOGO & Letters the double-sided light box
3. Advertisement Light boxes and the double-sided light box
4. Landscape, commercial, home and stage decoration

Product Feature


1. High brightness SMD CREE or OSRAM LEDs with heat sink.
2. **Side lighting module**, 40°*15 degree beam angle. High light transmittance Optical lens.
3. Moisture-proof, water-proof, dust proof and impact resistance.
4. Professional multi-optic design, best brightness, no bright dots. Lighting average over normal modules.
5. IP65 protection level.
6. Nice structure and injection molding process. Remarkable multiple optic technique.
7. RoHS standard of all raw materials.
8. Long lifespan and low failure rate.




Product Parameter

No.	Item	Parameter
1	Module Size	L495*W28*H15.6mm
2	LED	CREE or OSRAM
3	Drive type	Constant current drive
4	Input voltage	DC24V
5	Beam angle	40°*15 degree
6	Power(single module)	15W
7	Luminous Flux	1000~1400LM
8	Color Rendering Index	80
9	Color Temperature	2800-24000K
10	Emitting Color	Warm white/Pure white
11	Structure & material	Aluminum PCB. PVC cover
12	Max Connection Qty(PCS)	20(typ)
13	IP Level	IP65
14	Working temperature	-20~+45°C
15	Stock temperature	-30~+60°C
16	Warranty	3years

Light Attenuation Graph

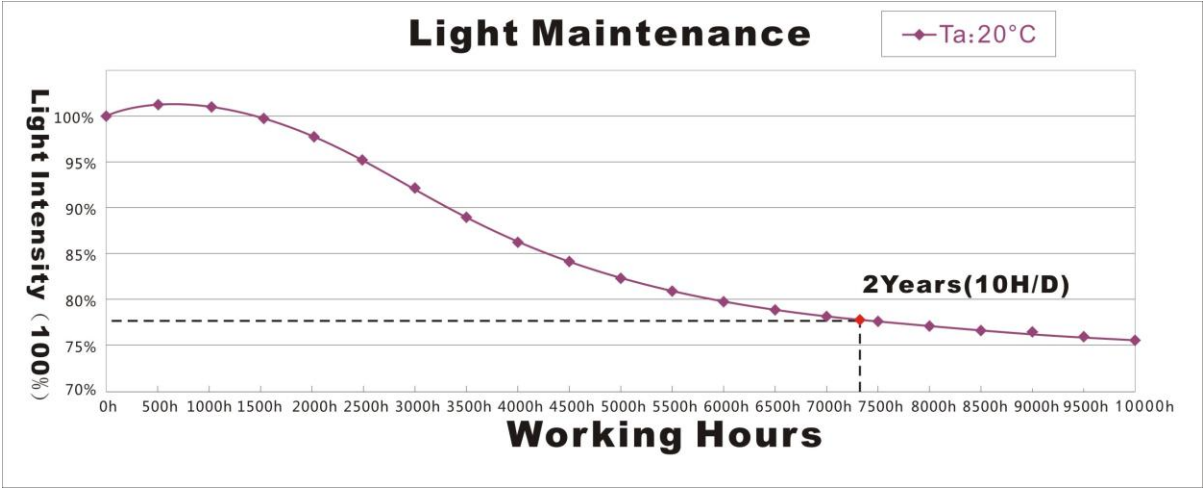

Light Distribution Curve

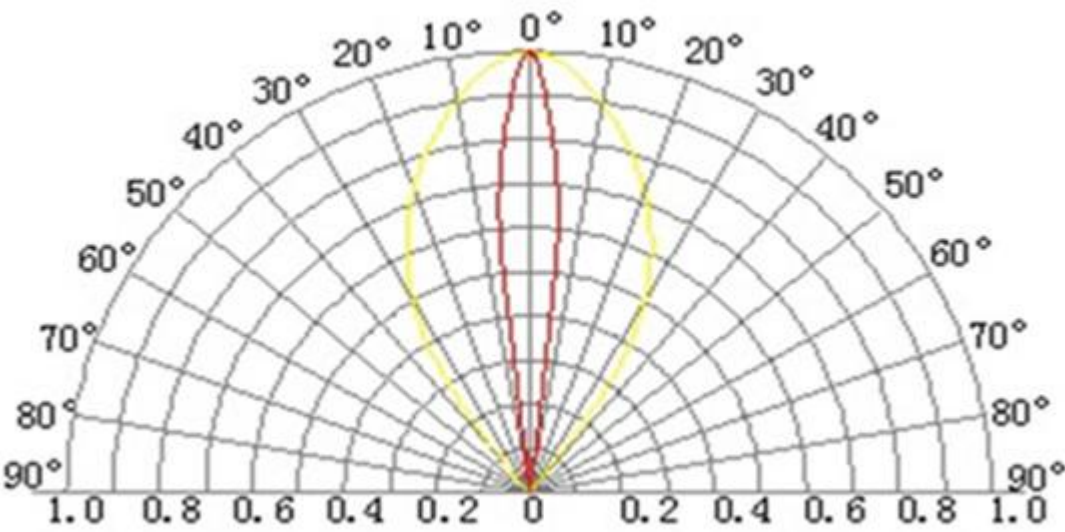

Packaging & Shipping



1. Carton size: 360mm*240mm*290mm, each bunch of modules 1 pcs
2. TTL: 1 pcs / small carton
3. Weight: 3 Kg
4. The above-mentioned data only for reference and need to be adjusted according to the actual situation.

Our Services

1. Reply your inquiry in 24 working hours.
2. Customized design is available, OEM and ODM are welcomed.
3. Delivery the goods to our customer all over the world with speed and precision.
4. Offer customer the lowest price with high quality LED light.

CE and RoHS

